

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
7 October 2004 (07.10.2004)

PCT

(10) International Publication Number  
**WO 2004/086657 A2**

(51) International Patent Classification<sup>7</sup>: **H04H 1/00**

(21) International Application Number:  
PCT/JP2004/004183

(22) International Filing Date: 25 March 2004 (25.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2003-082402 25 March 2003 (25.03.2003) JP  
2003-383529 13 November 2003 (13.11.2003) JP

(71) Applicant (for all designated States except US): **MAT-SUSHITA ELECTRIC INDUSTRIAL CO., LTD.**  
[JP/JP]; 1006, Oazakadoma, Kadoma-shi, Osaka 571-8501 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KATO, Hisaya.**  
**OZEKI, Hiroaki.**

(74) Agent: **NAKAJIMA, Shiro**; 6F, Yodogawa 5-Bankan,  
2-1, Toyosaki 3-chome, Kita-ku, Osaka-shi, Osaka  
531-0072 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: WIRELESS TERMINAL DEVICE

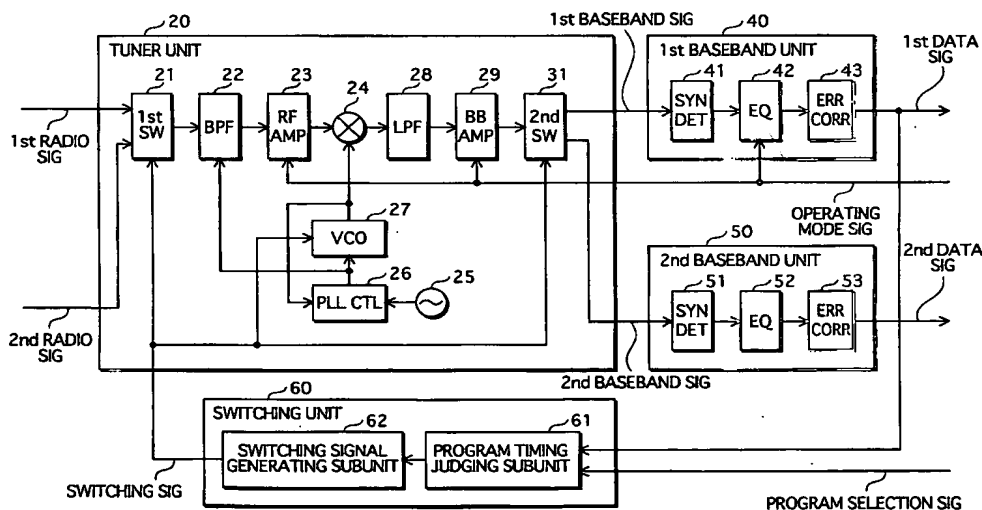

(57) Abstract: A first switching circuit (21) outputs a first radio signal representing a plurality of time-division multiplexed programs and a second radio signal other than the first radio signal, one at a time according to a switching signal. A voltage control oscillator (27) outputs a local signal at a frequency suitable for whichever signal outputted. Using the local signal generated, a frequency converter (24) frequency converts the first and second radio signals to first and second baseband signals, respectively. Via a second switching circuit (31), a first baseband unit (40) and a second baseband unit (50) are supplied with the first and second baseband signals, respectively, and demodulate them to first and second data signals. A switching unit (60) supplies the switching signal indicating periods during which the first radio signal represents a user-selected program, to a tuner unit (20) where the first and second radio signals are processed by time-sharing.



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*